VERTIC
www.vertic.fr

FIXING SYSTEM ON STEEL DECK

Anchor points

e = 250 / 280 / 304 / 333mm
(specific center distance upon request)

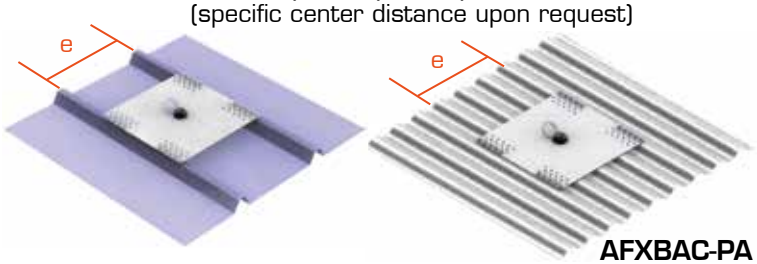

AFXBAC-PA

Fixing and water-tightness:

- **Aluminium deck** thickness ⩾ 0.9mm
  with 20 waterproof rivets
  (ref KV.BACALU not included)
- **Steel deck** thickness ⩾ 0.6mm
  with 20 self-drilling screws
  (ref KV.BAC not included)

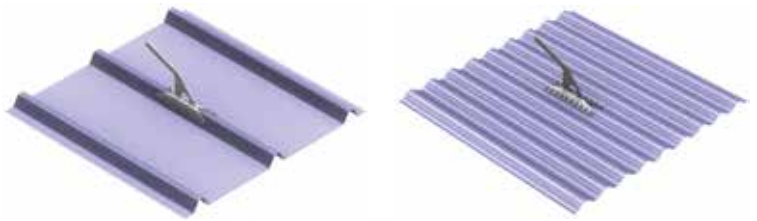

BFX-SC /BFX-TC / BFXA-TC

Fixing and water-tightness:

- **Aluminium deck** thickness ⩾ 0.9mm
  with 20 waterproof rivets and waterproof joints (included in the ref BFXA-TC)
- **Steel deck** thickness ⩾ 0.6mm
  with 20 self-drilling screws and waterproof joints (included in the ref BFXSC+TC)

Cable lifeline supports

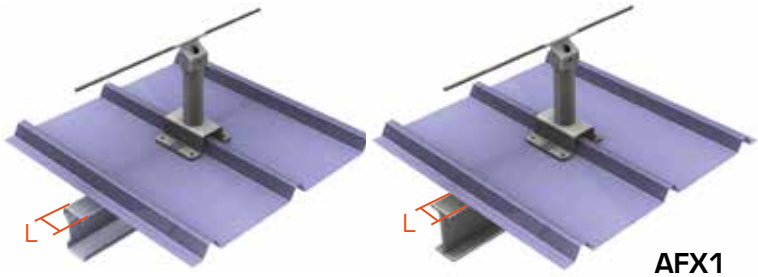

AFX1

Fixing and water-tightness:

Metallic purlin with folded steel section
L > 50mm ; thickness ⩾ 1,5mm
KV1A x 8

Metallic beam mini : IPN 80 / UPN 80
L > 50mm ; thickness ⩾ 1,5mm
KV1M x 8

e = 250 / 280 / 333mm
(specific center distance upon request)

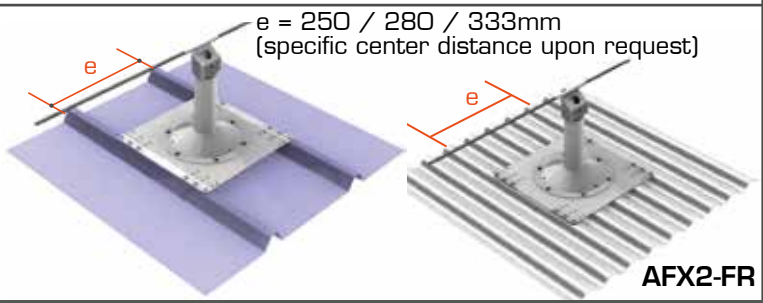

AFX2-FR

Fixing and water-tightness:

- **Aluminium deck** thickness ⩾ 0.9mm
- **Steel deck** thickness ⩾ 0.6mm

12 inserts and 4 waterproof joints *(or thread-cutting screws)*

Rail supports

e = 250 / 280 / 333mm
(specific center distance upon request)

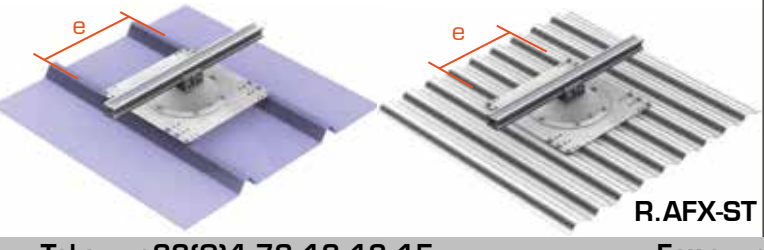

R.AFX-ST

Fixing and water-tightness:

- **Aluminium deck** thickness ⩾ 0.9mm
- **Steel deck** thickness ⩾ 0.6mm

12 inserts and 4 waterproof joints
(or thread-cutting screws)

Tel : +33(0)4 76 13 12 15 Fax : +33(0)4 76 13 12 16 support@vertic.fr